


Gr.III Gear pump/Eur.flange/Tapered shaft 1:8 /Side ports type threaded

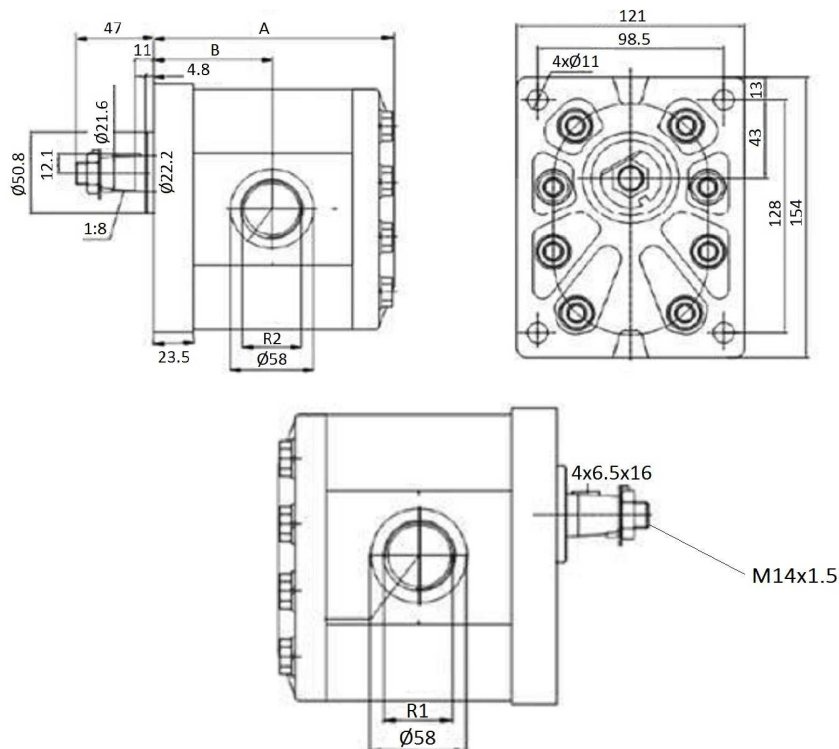

Rotation reference: BTD...I=Rotation left
BTD...D=Rotation right
Min 400 rpm

Flange and rear cover Cast iron

Part n°	R1	R2	Max. Press. (bar)	Max. Peak press.	R.P.M. Max	cm ³ / rev	A	B
BTB3220D01	3/4" BSP	3/4" BSP	200	250	3000	22	130,5	63,5
BTB3260D01	3/4" BSP	3/4" BSP	200	250	3000	26	133,5	65
BTB3280D01	1" BSP	3/4" BSP	200	250	3000	28	134,5	65,5
BTB3320D01	1" BSP	3/4" BSP	200	250	3000	32	137,5	67
BTB3360D01	1" BSP	3/4" BSP	200	250	3000	36	140,5	68,5
BTB3420D01	1" BSP	3/4" BSP	200	250	2800	42	144,5	70,5
BTB3460D01	1" BSP	3/4" BSP	200	250	2400	46	147,5	72
BTB3500D01	1" BSP	3/4" BSP	200	250	2400	50	150	73,5
BTB3550D01	1" BSP	3/4" BSP	200	250	2400	55	153,5	75

R1 = inlet; R2 = outlet
DECIBELS: 85dB
Tightening torque 45-50 Nm