



BIDIRECTIONAL PANEL MOUNTING FLOW CONTROL VALVES

SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Manifold material:	Zinc plated steel

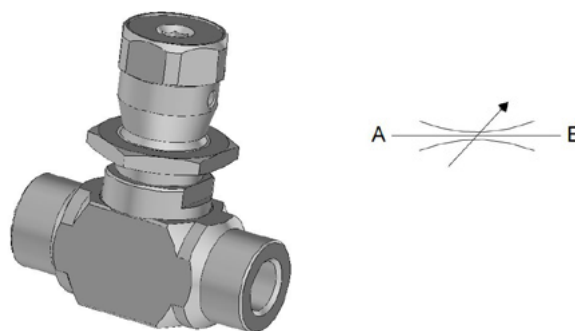


DIMENSIONS (mm)

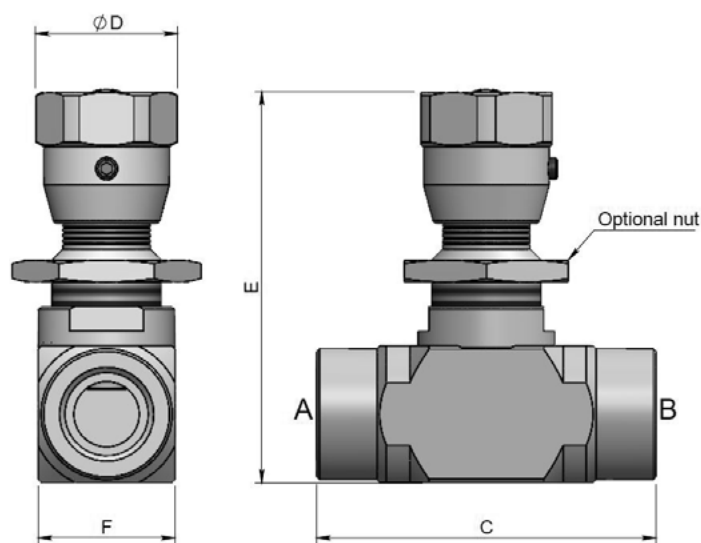

PERFORMANCE

Oil viscosity 24 mm²/s (3,5 °E) - Temperature 50°C

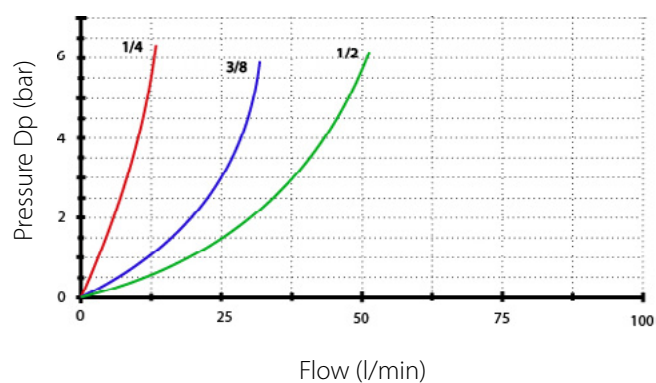

Standard code	Thread	ØD	E	F	C	kg	Max Pressure	Q max (l/min)
DRV-SC-14	1/4	26	80	25	62	0.34	350	15
DRV-SC-38	3/8	26	80	25	62	0.33	350	30
DRV-SC-12	1/2	26	88	30	62	0.45	350	50