



UNIDIRECTIONAL PANEL MOUNTING FLOW CONTROL VALVES

SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Manifold material:	Zinc plated steel




DIMENSIONS (mm)

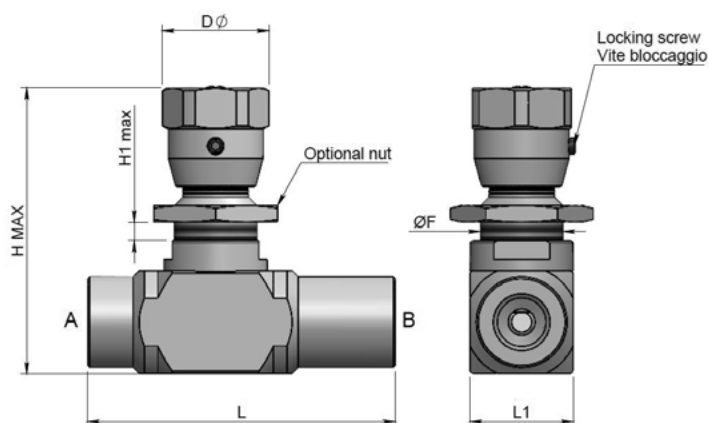

PERFORMANCE

Oil viscosity 24 mm²/s (3,5 °E) - Temperature 50°C

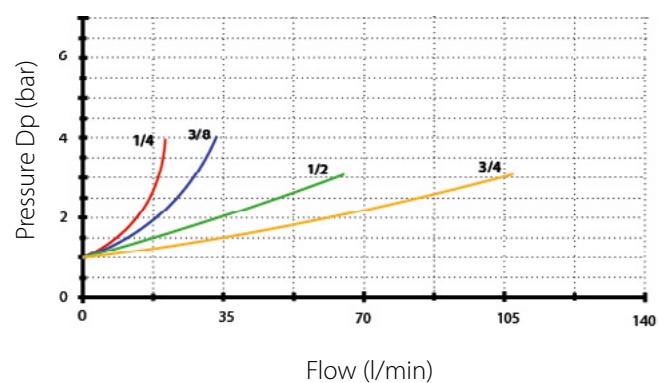

Standard code	Thread	ØF	L	L1	ØD	H max	H1 max	kg	Max Pressure	Q max (l/min)
DV-SC-14	1/4	M20x1.5	73	25	26	75	4.5	0.4	400	15
DV-SC-38	3/8	M20x1.5	83	30	26	83	4.5	0.4	400	30
DV-SC-12	1/2	M20x1.5	94	30	26	90	4.5	0.6	400	50